
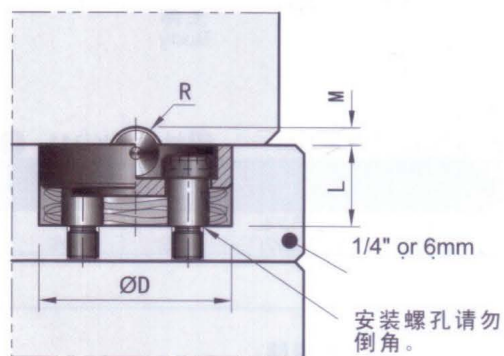
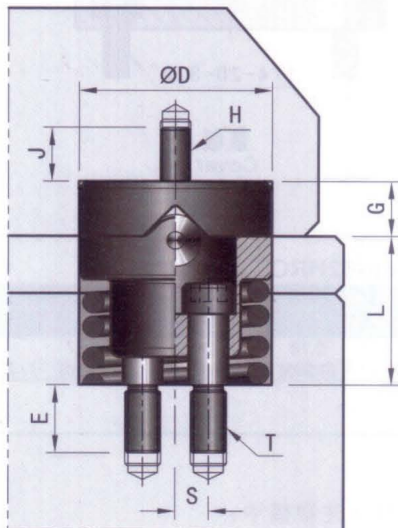
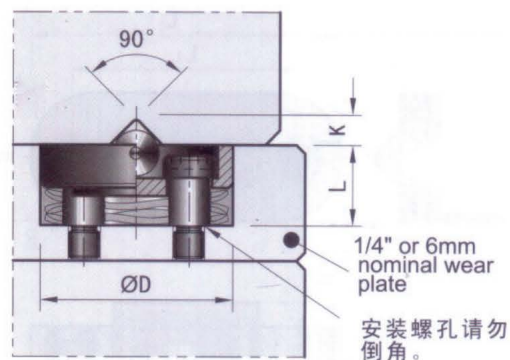


定位珠 SRT INTERNAL LATCH LOCK [筒体]



Code	D +0.005 -0	L ±0.001	S ±0.002	T	E	荷重(lbs)	蓋闕	G ±0.001	C ±0.001	H	J
SRT-30	0.75	0.5	0.15	#8-32	0.19	30	SSRTC-30	0.25	0.25	#6-32	0.25
SRT-80	0.875	0.75	0.15	#8-32	0.245	80	SSRTC-80	0.25	0.3	#6-32	0.25

Code	D +0.005 -0	L ±0.001	S ±0.002	T	E	荷重(lbs)	蓋闕	G ±0.001	C ±0.001	H	J
SRTM-13	19.1	12.7	3.8	M4	4.8	13.5	SSRTC-13	6.35	6.35	M3	6.35
SRTM-36	22.3	19.05	3.8	M4	6.2	36	SSRTC-36		7.6	M3	6.35

Code	V-Groove	Ball Cut		Code	V-Groove	Ball Cut	
	K	R	M		K	R	M
SRT-30	0.078	0.125	0.03	SRT-30	2mm	3mm	0.75mm
SRT-80				SRT-80			

產品特點:

1. 相比其它定位珠，不易損傷行位機構的滑塊；
2. 定位部分為滾珠結構，相比滑動結構，摩擦力減少；滑塊滑動更順暢；
3. 定位珠安裝螺孔請勿倒角，如有倒角安裝螺絲將有可能會陷入安裝螺孔內（如圖）